



Gateway KAV60 LT2016U 3G Card Replacement

Gateway KAV60 LT2016U 3G card replacement.

Written By: Lydia Benjock



INTRODUCTION

If you have a Phillips #0 screwdriver, you can easily replace the 3G card.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Battery



- Unlock the tab located in the top left corner of the netbook.
 - The red tab indicated that the battery has been properly unlocked.
 - Remove the battery.
- i** When working with electronics, it is always wise to remove the power source before taking the device apart.

Step 2 — 3G Card



- The 3G card is located under this cover.

Step 3




- Use the Phillips #0 screwdriver to remove one (1) 5mm screw.
- Use the plastic opening tools to lift up the cover.

Step 4




- Using the Phillips #0 screwdriver, remove one (1) 5mm screw holding the card in place.

Step 5

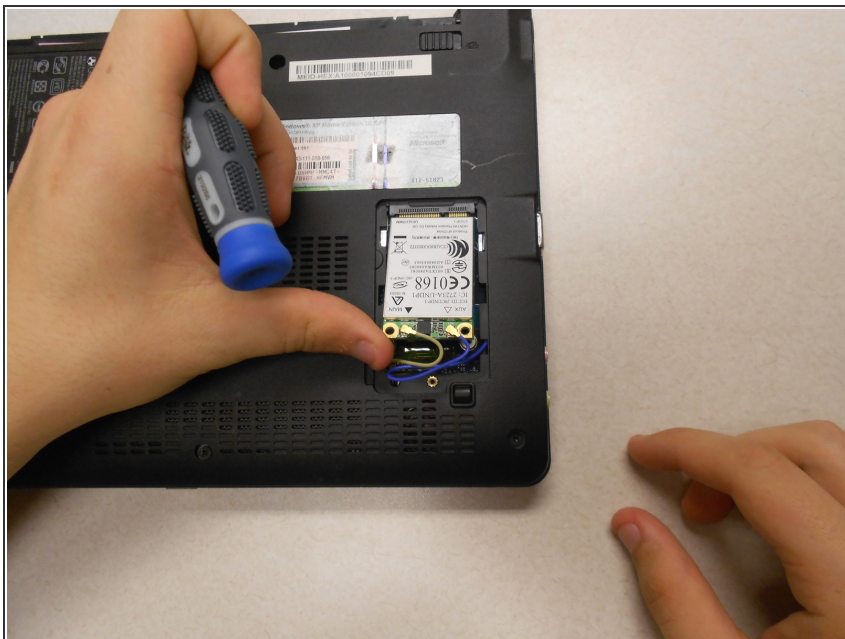

- Remove the 3G card from the computer by lifting the card up from the bottom.

Step 6

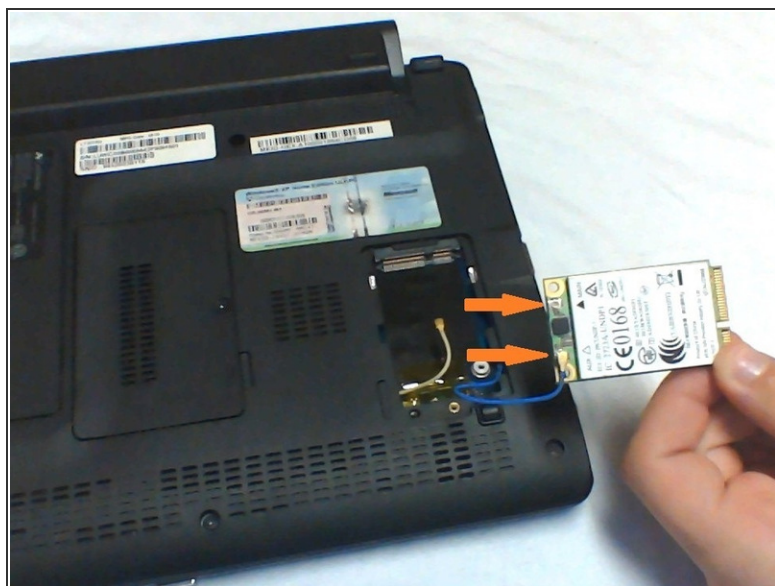

- Notice the two wires connected to the card.
- Gently detach the wires from the card. The metal portions will "pop" off

To reassemble your device, follow these instructions in reverse order.

